

# FINAL EXAM

## ECEN 478 - Wireless Communications

*Joseph J. Boutros*

May 1, 2008

### Part I. Receivers for Code Division Multiple Access

We consider a synchronous DSSS-CDMA system with 2 users. The BPSK symbol of user 1 (resp. user 2) is denoted by  $I_1 = \pm\omega_1$  (resp.  $I_2 = \pm\omega_2$ ). Each symbol is spread by a factor of  $N$  after multiplication with  $N$  chips of a pseudo-noise (PN) sequence. The two users are using two different PN sequences with a cross-correlation equal to  $\rho$ , where  $0 \leq \rho < 1$ . The real wireless channel model is

$$y_i = x_i^1 + x_i^2 + \eta_i, \quad (1)$$

where the time index  $i$  varies from 0 to  $N - 1$ ,  $y_i$  is the sample received at the CDMA detector input,  $x_i^j$  is the chip transmitted by user  $j$  at time  $i$ ,  $j = 1, 2$ . It is given by

$$x_i^j = s_i^j \cdot I_j, \quad (2)$$

where  $s^j = (s_0^j \ s_1^j \ \dots \ s_{N-1}^j)$  is the spreading sequence (signature) of user  $j$ ,  $s_i^j = \pm 1$ . As stated above, the two signatures satisfy

$$\frac{1}{N} \sum_{i=0}^{N-1} s_i^1 \cdot s_i^2 = \rho. \quad (3)$$

The real additive white noise  $\eta_i$  in (1) is  $\mathcal{N}(0, \sigma^2)$ , by convention we assign  $\sigma^2 = N_0/2$ . The signal-to-noise ratios are defined as (per user per information bit)

$$\gamma_j = N \frac{(\omega_j)^2}{N_0}, \quad j = 1, 2. \quad (4)$$

The CDMA joint receiver starts by despreading both users. The despreader output is

$$r_1 = \frac{\langle s^1, y \rangle}{N} = \frac{1}{N} \sum_{i=0}^{N-1} s_i^1 \cdot y_i, \quad (5)$$

when despreading the first user. Similarly, we have

$$r_2 = \frac{\langle s^2, y \rangle}{N} = \frac{1}{N} \sum_{i=0}^{N-1} s_i^2 \cdot y_i, \quad (6)$$

when despreading the second user. The symbol “ $\langle, \rangle$ ” denotes the scalar product of two vectors, and the detector observation vector before despreading is  $y = (y_0 \ y_1 \ \dots \ y_{N-1})$ .

In column notations, the symbol vector, the observation vector after despreading, and the noise vector after despreading are

$$I = \begin{bmatrix} I_1 \\ I_2 \end{bmatrix}, \quad r = \begin{bmatrix} r_1 \\ r_2 \end{bmatrix}, \quad b = \begin{bmatrix} b_1 \\ b_2 \end{bmatrix}.$$

Finally, we define the correlation matrix of the two signatures as

$$R = \begin{bmatrix} 1 & \rho \\ \rho & 1 \end{bmatrix}.$$

**I.1)** Briefly sketch the proof of the following expression

$$r = RI + b. \tag{7}$$

Relate  $b$  to  $\eta$ .

**I.2)** Express the variance  $\sigma_b^2 = E[|b_1|^2] = E[|b_2|^2]$  function of the original channel noise variance  $\sigma^2$  and the spreading factor  $N$ .

**I.3)** Compute the correlation coefficient  $E[b_1 b_2]$ . Under what condition the two noise samples  $b_1$  and  $b_2$  are uncorrelated?

Let  $\Delta$  be the energy ratio of the two users,

$$\Delta = \frac{\gamma_2}{\gamma_1} = \left( \frac{\omega_2}{\omega_1} \right)^2$$

It is supposed that  $\rho^2 \leq \Delta \leq 1/\rho^2$ . Let us also define the following function

$$F(\gamma, \Delta) = \frac{1}{2} \mathbb{Q} \left( \sqrt{2\gamma(1 + \rho\sqrt{\Delta})^2} \right) + \frac{1}{2} \mathbb{Q} \left( \sqrt{2\gamma(1 - \rho\sqrt{\Delta})^2} \right), \tag{8}$$

where  $\mathbb{Q}(x)$  is the gaussian tail function.

### Conventional detection

A conventional receiver does not take into account the multiple access interference. In order to estimate  $I_1$ , a conventional detector simply checks the sign of  $r_1$ ,

$$\hat{I}_1(\text{conv}) = \Psi(r_1) = \begin{cases} +\omega_1, & r_1 > 0, \\ -\omega_1, & r_1 < 0. \end{cases}$$

Similarly,  $I_2$  is estimated from  $r_2$ . The correlation  $\rho$  between  $s^1$  and  $s^2$  is not considered by such a conventional detection (in opposition to multiuser detection, as the two other techniques described below).

**I.4)** Under conventional detection, prove that the error probability of the first user is

$$P_{e1}(\text{conv}) = F(\gamma_1, \Delta) \tag{9}$$

where  $F(\cdot)$  is defined by (8). In an identical manner, prove that the second user has

$$P_{e2}(\text{conv}) = F\left(\gamma_2, \frac{1}{\Delta}\right) \tag{10}$$

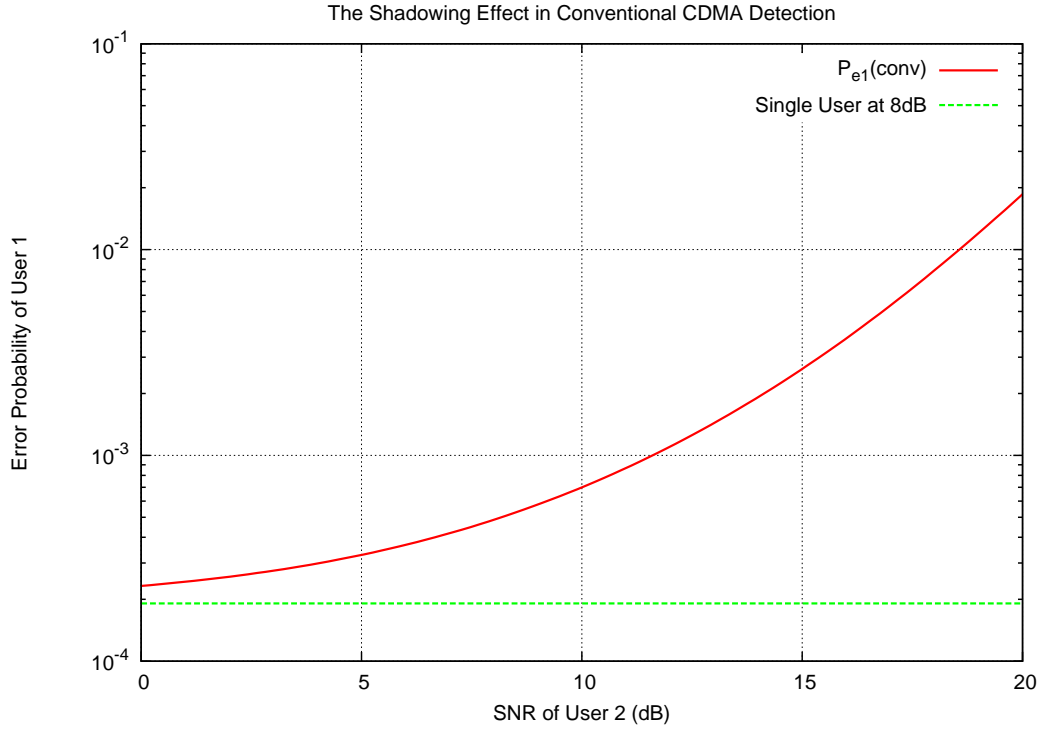


Figure 1: Conventional CDMA detection of two users. Error probability of User 1 versus the SNR of User 2. Parameters are  $\gamma_1 = 8dB$  and  $\rho = 1/8$ .

**I.5)** Assume that  $\gamma_1$  and  $\rho$  are fixed. Let the second user increase  $\gamma_2$ , how does  $P_{e1}(conv)$  behave? Interpret the result illustrated in Figure 1 for  $\gamma_1 = 8dB$  and  $\rho = 1/8$ .

### Zero-forcing detection

The multiuser ZF receiver multiplies the observation given in (7) by the inverse of the correlation matrix,

$$\tilde{r} = R^{-1}r = I + R^{-1}b$$

Then, threshold detection is applied on  $\tilde{r}$ ,

$$\hat{I}_1(ZF) = \Psi(\tilde{r}_1) = \begin{cases} +\omega_1, & \tilde{r}_1 > 0, \\ -\omega_1, & \tilde{r}_1 < 0. \end{cases}$$

**I.6)** Find the variance per component  $\tilde{\sigma}^2$  of  $\tilde{b} = R^{-1}b$  as a function of  $\rho$  and  $\sigma_b^2$ .

**I.7)** Show that  $\tilde{\sigma}^2 \geq \sigma_b^2$ . Thus, the ZF receiver eliminates the multiple access interference but it amplifies the additive noise. Interpret the result illustrated in Figures 2 and 3. Is there any shadowing effect after ZF detection?

**I.8)** Under ZF detection, prove that User 1 error probability is

$$P_{e1}(ZF) = \mathbb{Q}\left(\sqrt{2\gamma_1(1-\rho^2)}\right) \quad (11)$$

The value of the above expression has been plotted in Figure 2 and Figure 3 for  $\rho = 1/8$  and  $\rho = 1/2$  respectively.

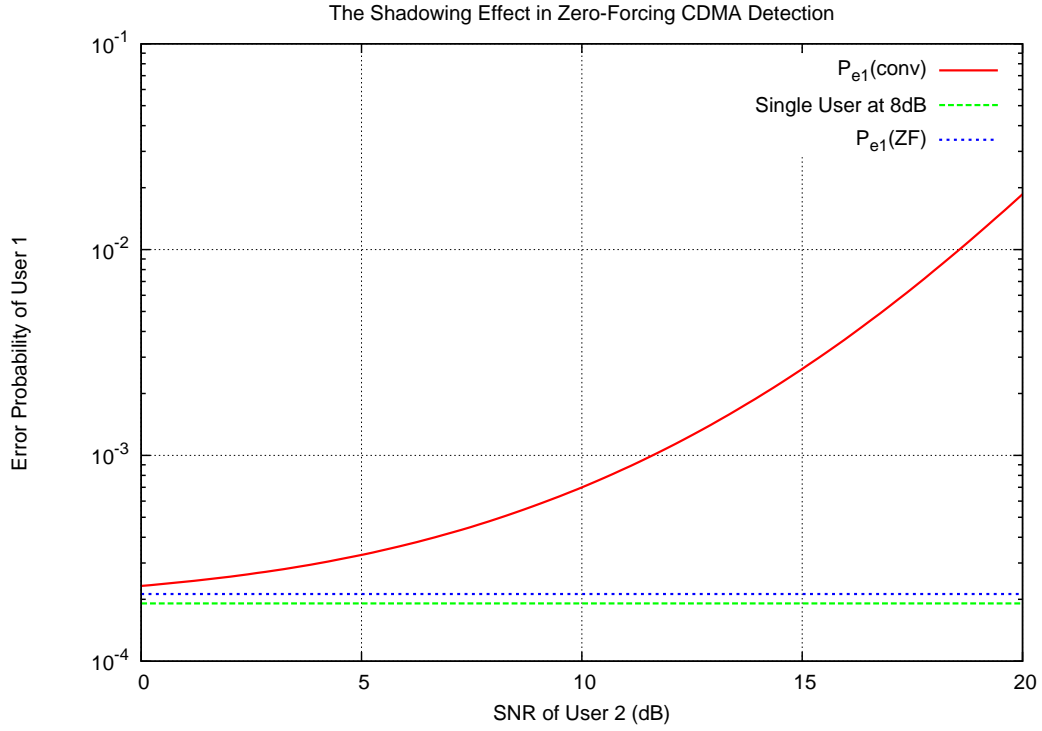


Figure 2: ZF versus conventional CDMA detection. Error probability of User 1 versus the SNR of User 2. Parameters are  $\gamma_1 = 8dB$  and  $\rho = 1/8$ . Noise amplification due to ZF is negligible at this value of the cross-correlation  $\rho$ .

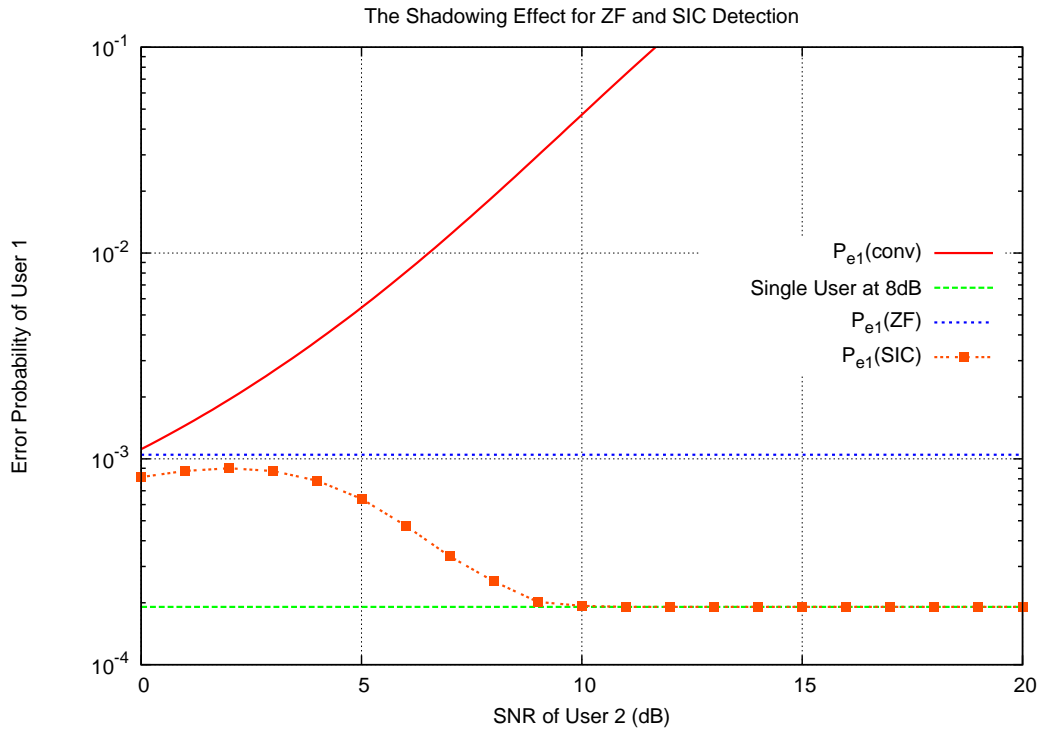


Figure 3: SIC and ZF versus conventional CDMA detection. Error probability of User 1 versus the SNR of User 2. Parameters are  $\gamma_1 = 8dB$  and  $\rho = 1/2$ . Noise amplification due to ZF is not negligible for  $\rho = 1/2$ .

### Subtractive interference cancellation

The SIC detector proceeds as follows, in an iterative manner,

#### Iteration 1:

- Consider  $\tilde{r}_1 = r_1 = I_1 + \rho I_2 + b_1$ .
- Find  $\hat{I}_1 = \Psi(\tilde{r}_1)$ .
- Compute  $\tilde{r}_2 = r_2 - \rho \hat{I}_1 = \rho(I_1 - \hat{I}_1) + b_2$ .
- Find  $\hat{I}_2 = \Psi(\tilde{r}_2)$ .

#### Iteration 2:

- Compute  $\tilde{r}_1 = r_1 - \rho \hat{I}_2$ .
- Find  $\hat{I}_1 = \Psi(\tilde{r}_1)$ .
- Compute  $\tilde{r}_2 = r_2 - \rho \hat{I}_1$ .
- Find  $\hat{I}_2 = \Psi(\tilde{r}_2)$ .

Iterations  $m \geq 3$  are identical to iteration 2.

**I.9)** Let  $P_{e1}^m(SIC)$  and  $P_{e2}^m(SIC)$  denote the error probability of User 1 and User 2 respectively, after  $m$  iterations. For  $m \geq 2$ , show that

$$P_{e1}^m = (1 - P_{e2}^{m-1})Q_1 + P_{e2}^{m-1}F_1 \quad (12)$$

where  $Q_1 = \mathbb{Q}(\sqrt{2\gamma_1})$  is the single user performance of User 1 (absence of interference) and  $F_1 = F(\gamma_1, 4\Delta)$  is the conventional CDMA performance of User 1 when the SNR of the interferer is  $4\gamma_2$ . Show also that

$$P_{e2}^m = (1 - P_{e1}^m)Q_2 + P_{e1}^m F_2 \quad (13)$$

where  $Q_2 = \mathbb{Q}(\sqrt{2\gamma_2})$  and  $F_2 = F(\gamma_2, 4/\Delta)$ .

**I.10)** In the steady state, when  $m \rightarrow +\infty$ , prove that the SIC detector yields

$$P_{e1}(SIC) = \frac{Q_1 + (F_1 - Q_1)Q_2}{1 - (F_1 - Q_1)(F_2 - Q_2)} \quad (14)$$

Under what condition we have  $P_{e1}(SIC) \approx Q_1$ . In this case, the SIC is capable of eliminating the multiple access interference without noise amplification and without shadowing effect when  $\gamma_2 > \gamma_1$ . An illustration of SIC behavior is given in Figure 3.

## Part II. Multipath Diversity in Spread Spectrum

The notations of Part I are adopted. Only one user is transmitting on a wireless channel using a BPSK modulation and direct sequence spreading via a signature  $s^1$ . Time index (at the chip level) is always indicated by the integer  $i$ . In this section, the index  $j$  refers to time shifts due to multipath. For simplicity of notations, superscripts indicating the user number are eliminated. Hence, the transmitted chips  $x_i^1$  are replaced by  $x_i$ , the signature chips  $s_i^1$  are replaced by  $s_i$ , and the spreading sequence  $s^1$  is simply  $s = \{s_i\}$ ,  $s_i = \pm 1$ , and  $i \in \mathbb{Z}$ . It is assumed that  $s$  is periodic with period  $N \gg 1$ . The auto-correlation of  $s$  is supposed to be perfect, i.e.,

$$\rho_s(j) = \frac{1}{N} \sum_{i=0}^{N-1} s_i \cdot s_{i-j} \approx 0, \quad \forall j \neq 0. \quad (15)$$

Before spreading, the user symbol at time  $t$  (at the information bit level) is  $I_1[t] = \pm\omega$ . The signal-to-noise ratio  $\gamma = \gamma_1$  is still defined by (4) in Part 1. In this section, we are

only interested by the transmission and the detection of symbol  $I_1 = I_1[0]$ . The influence of  $I_1[-1]$  (past symbol) and  $I_1[1]$  (future symbol) are neglected.

The channel is assumed to have multipath fading. Its complex model is

$$y_i = \sum_{j=0}^{L-1} h_j \cdot x_{i-j} + \eta_i, \quad i = 0 \dots N-1, \quad (16)$$

where  $h_j \sim \mathcal{CN}(0, 1)$ , and  $\eta_i \sim \mathcal{CN}(0, 2\sigma^2)$ . The  $L$  fading coefficients are supposed to be uncorrelated. The transmitted chip is obtained as in (2) via  $x_i = s_i I_1$ . The number  $L$  of channel paths satisfies  $1 \leq L \ll N$ .

**II.1)** Assume that the channel coherence bandwidth is  $B_{coh} = 500KHz$ . Without a spreaded spectrum ( $N = 1$ ), what would be the value of  $L$  if the transmitted signal bandwidth is  $W_0 = 100KHz$ ?

**II.2)** After spreading, e.g.,  $N = 100$  and  $W = NW_0 = 10MHz$ , what is the number  $L$  of paths observed by the receiver? From a diversity point of view, is it better to have  $L = 1$  or  $L > 1$ ?

We would like to build a receiver capable of exploiting the  $L$  degrees of freedom in the channel. In order to obtain a diversity of order  $L$ , the receiver should create the  $\chi^2$  distributed quantity  $\sum_{\ell=0}^{L-1} |h_\ell|^2$ . This is possible with the structure proposed below, a structure known as the Rake receiver. We propose to build a Rake with  $L$  fingers, the output of finger  $\ell$  is denoted by  $f_\ell$ .

**II.3)** The finger output number  $\ell$  of a Rake receiver is determined by the projection of the received signal on an  $\ell$ -shifted version of the spreading sequence,  $\ell = 0, \dots, L-1$ . The finger output is

$$f_\ell = \frac{\langle \{s_{i-\ell}\}, y \rangle}{N} = \frac{1}{N} \sum_{i=0}^{N-1} s_{i-\ell} y_i, \quad (17)$$

where  $y_i$  is given by the channel model in (16). Show that

$$f_\ell \approx h_\ell I_1 + b_\ell, \quad (18)$$

where  $b_\ell$  is an additive gaussian noise.

**II.4)** After computing the output of its  $L$  fingers, the Rake performs a maximum ratio combining

$$U = \sum_{\ell=0}^{L-1} h_\ell^* f_\ell \quad (19)$$

The information symbol is estimated with  $\hat{I}_1 = \Psi(\Re\{U\})$ . At high SNR, show that the error probability is written as  $P_e \approx \tau/\gamma^L$ . Find the expression of  $\tau$ .

**II.5)** The Rake receiver described above knows perfectly the values of the channel coefficients  $\{h_j\}$ , i.e., this is a coherent Rake receiver. Is it possible to build a non-coherent Rake receiver?

.  
.  
.

.Good Luck.  
.Joseph Boutros.