

# Advanced Digital Communications and Coding

## EXERCISES

Joseph J. Boutros & Fatma Kharrat-Kammoun

June 2, 2006

### Exercice I - The Sphere Decoder, an example with $A_2$

Consider the hexagonal point lattice  $A_2 \subset \mathbb{R}^2$ . The studied lattice version is generated by the following generator matrix  $M$  written in row convention

$$M = \begin{pmatrix} 1 & 0 \\ 1/2 & \sqrt{3}/2 \end{pmatrix} \quad (1)$$

A lattice point  $x = (x_1 \ x_2) \in A_2$  is defined by  $x = zM$ , where  $z = (z_1 \ z_2) \in \mathbb{Z}^2$ . Hexagonal lattice points and their Voronoi cells are illustrated in Figure 1. Let  $d_{Emin}$  denote the minimum Euclidean distance of  $A_2$  generated by the above matrix  $M$ . The packing radius  $\rho = d_{Emin}/2$  and the covering radius  $R$  are depicted in Figure 2.

- 1) Determine  $\rho$  and  $R$ .
- 2) What is the volume of a Voronoi cell ?
- 3) Check that the packing density  $\Delta$  of  $A_2$  is equal to 0.906, i.e. 90.6% of the bidimensional space is covered by the packing balls of  $A_2$ .
- 4) Let  $G = MM^t = [g_{ij}]$  be the Gram matrix. We define the following quadratic form  $Q(z)$  associated to the squared Euclidean norm

$$Q(z) = \|x\|^2 = xx^t = zGz^t = \sum_i \sum_j g_{ij} z_i z_j \quad (2)$$

Prove that  $Q(z)$  can be written as  $Q(z) = q_{11}Z_1^2 + q_{22}Z_2^2$ , where  $Z_1 = z_1 + q_{12}z_2$  and  $Z_2 = z_2$ . Find the values of  $q_{ij}$ . For higher dimensions  $n \geq 2$ , a Cholesky or a QR decomposition is applied in order to write  $Q(z) = \sum_{i=1}^n q_{ii}Z_i^2$ .

- 5) The enumeration of lattice points satisfying  $\|x\|^2 \leq C$ , where  $C \in \mathbb{R}^+$  is a fixed squared radius, is equivalent to solving  $Q(z) \leq C$ . Let  $S(0, \sqrt{C})$  denote the sphere with center 0 and radius  $\sqrt{C}$ . Prove that enumerating lattice points inside  $S(0, \sqrt{C})$  is equivalent to solving

the following recursive inequalities

$$\begin{aligned}
 -\sqrt{\frac{C}{q_{22}}} &\leq z_2 \leq +\sqrt{\frac{C}{q_{22}}} \\
 -\sqrt{\frac{C-q_{22}z_2^2}{q_{11}}} - q_{12}z_2 &\leq z_1 \leq +\sqrt{\frac{C-q_{22}z_2^2}{q_{11}}} - q_{12}z_2
 \end{aligned}
 \tag{3}$$

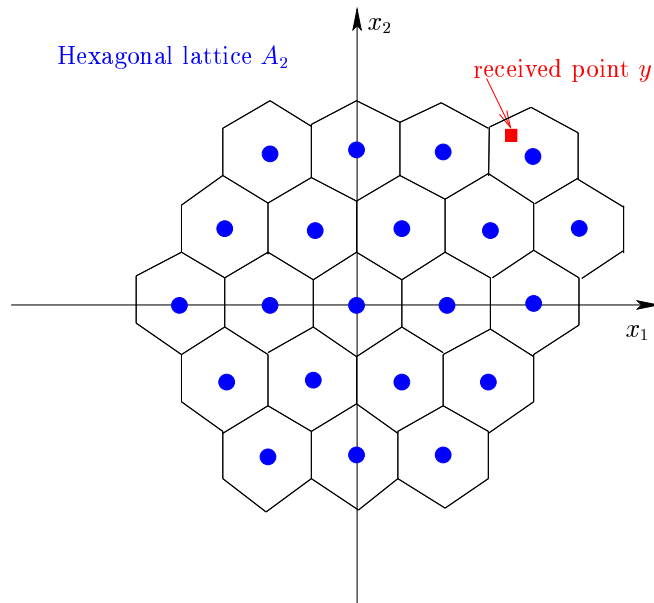


FIG. 1 – The hexagonal point lattice  $A_2$  in the bidimensional plane.

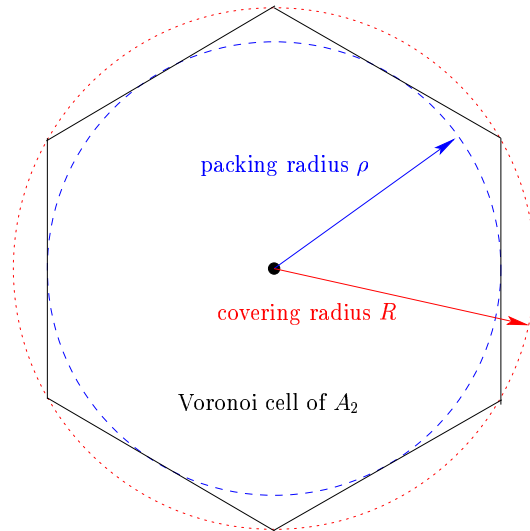


FIG. 2 – Representation of the packing radius  $\rho$  and the covering radius  $R$ .

**6)** Let  $y = (y_1 \ y_2) \in \mathbb{R}^2$  be a randomly chosen point, e.g.  $y$  may be the output of a Gaussian channel with  $y = x + \eta$ , where  $\eta$  is an additive white Gaussian noise and  $x \in A_2$ . Let  $\epsilon$  be a

vanishing positive real number.

**6.a)** Prove that  $S(y, R + \epsilon)$  contains at least one lattice point.

**6.b)** What is the maximum number of lattice points inside  $S(y, R + \epsilon)$ ?

**7)** A sphere decoder is a decoder that finds the closest lattice point to  $y$  by enumerating all lattice points inside  $S(y, R + \epsilon)$  and keeping the nearest one. Hence, the sphere decoder for  $A_2$  takes  $C = R^2 + \epsilon$  and solves  $\|y - x\|^2 \leq C$  in order to get

$$x_{ML} = \arg \min_{x \in A_2} \|y - x\|^2$$

**7.a)** Prove that the sphere decoder is given by the inequalities of question 5 above, where  $z$  is replaced by  $z - \xi$  and  $\xi = yM^{-1}$ .

**7.b)** Apply the sphere decoder in order to find the closest lattice point  $x_{ML}$  to the received noisy point given by  $y = (1.75, 1.75)$ .

## Exercice II - The Gosset lattice $E_8$ , complex construction

The point lattice  $E_8$  yields the densest lattice packing in  $\mathbb{R}^8$ . It is the unique lattice in dimension 8 with an Hermite constant (fundamental gain) equal to 2, and a kissing number equal to 240. Recall that the fundamental gain of a real lattice  $\Lambda \in \mathbb{R}^n$  of rank  $n$  is defined as

$$\gamma(\Lambda) = \frac{d_{Emin}^2(\Lambda)}{n^{1/2} \sqrt{vol(\Lambda)}} \quad (4)$$

where  $vol(\Lambda) = |\det(M)|$ ,  $M$  being a square  $n \times n$  generator matrix of  $\Lambda$ . The kissing number  $\tau$  is given by the number of lattice points on the first lattice shell, also equal to the number of neighbouring packing balls tangent to the one centered on the origin.

Let  $\mathcal{G} = \mathbb{Z}[i] \sim \mathbb{Z}^2$  denote the ring of Gaussian integers. Let  $\phi = 1+i \in \mathcal{G}$ , where  $i = \sqrt{-1}$ . The ring  $\mathcal{G}$  can be partitioned via two subgroups, i.e. the partition chain  $\mathcal{G}/\phi\mathcal{G}/\phi^2\mathcal{G}$  is used. At depth 1, we have  $\mathcal{G} = \phi\mathcal{G} + [\mathcal{G}/\phi\mathcal{G}]$ . At depth 2, we have  $\mathcal{G} = \phi^2\mathcal{G} + [\phi\mathcal{G}/\phi^2\mathcal{G}] + [\mathcal{G}/\phi\mathcal{G}]$ .

- 1) Find the order of the quotient groups  $[\mathcal{G}/\phi\mathcal{G}]$  and  $[\phi\mathcal{G}/\phi^2\mathcal{G}]$ . Tip : Determine the fundamental volumes of both lattices  $\mathcal{G}$  and  $\phi\mathcal{G}$ . Find also  $|\mathcal{G}^N/g\mathcal{G}^N|$ , where  $g \in \mathcal{G}$  and  $N \in \mathbb{N}$ .
- 2) Give the typical coset leaders of the partition  $\mathcal{G}/\phi\mathcal{G}$ , i.e. the typical elements of the quotient group  $[\mathcal{G}/\phi\mathcal{G}]$ . Use Figure 3 for illustration.
- 3) Give the typical coset leaders of the partition  $\phi\mathcal{G}/\phi^2\mathcal{G}$ , i.e. the typical elements of the quotient group  $[\phi\mathcal{G}/\phi^2\mathcal{G}]$ . Use Figure 4 for illustration.

- 4) Consider the complex lattice  $\Lambda = (4, 1, 4) + \phi(4, 3, 2) + \phi^2\mathcal{G}^4$ , where  $(4, 1, 4)$  is the binary repetition code of length 4, and  $(4, 3, 2)$  is the binary single parity-check code of length 4. In the formula of  $\Lambda$ , binary elements 0 and 1 should be embedded into the complex ring  $\mathcal{G}$ .
- 4.a) Consider the chain  $\mathcal{G}^4/\Lambda/\phi^2\mathcal{G}^4$ . Deduce the fundamental volume of  $\Lambda$ .
- 4.b) Determine the minimum Euclidean distance of  $\Lambda$  and hence its Hermite constant. At this point, you must find that  $\Lambda = E_8$ .
- 4.c) From the complex formula of  $E_8$ , check that  $\tau = 240$  by enumerating all lattice points of shortest length.

5) An encoder for a finite size constellation carved from  $E_8$  is shown in Figure 5. This encoder is based on the formula  $E_8 = (4, 1, 4) + \phi(4, 3, 2) + \phi^2\mathcal{G}^4$  (B construction).

5.a) What is the number of bits per complex symbol in the coded 64-QAM? What should be the uncoded QAM reference constellation?

5.b) Compare the coded 64-QAM and the uncoded reference, and find again the 3dB gain over a Gaussian channel given in the Hermite constant.

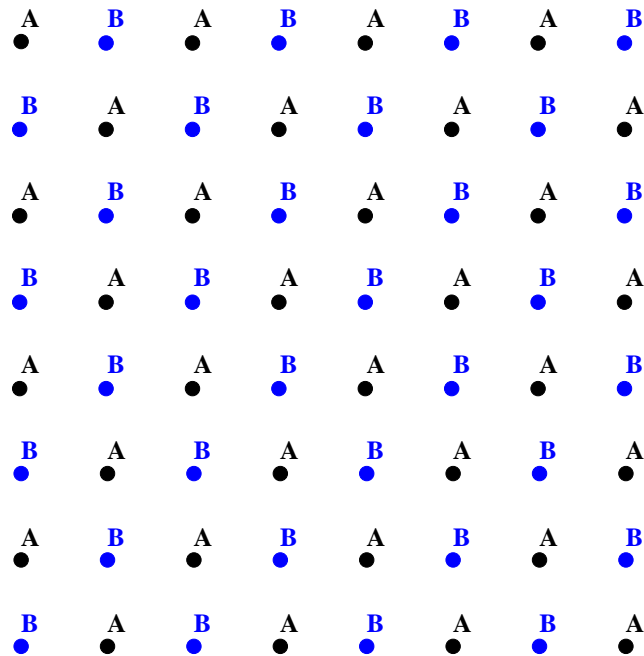


FIG. 3 – Depth-1 partitioning of a 64-QAM corresponding to  $\mathcal{G} = \phi\mathcal{G} + [\mathcal{G}/\phi\mathcal{G}]$ .

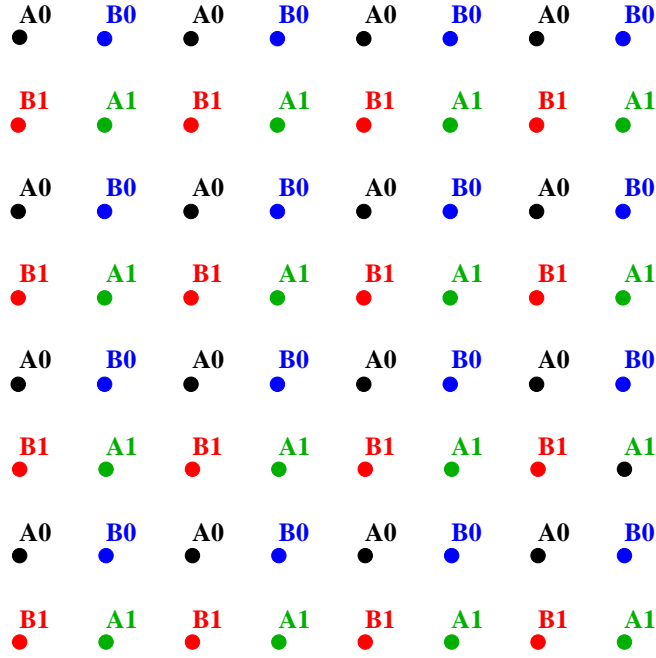


FIG. 4 – Depth-2 partitioning of a 64-QAM corresponding to  $\mathcal{G} = \phi^2\mathcal{G} + [\phi\mathcal{G}/\phi^2\mathcal{G}] + [\mathcal{G}/\phi\mathcal{G}]$ .

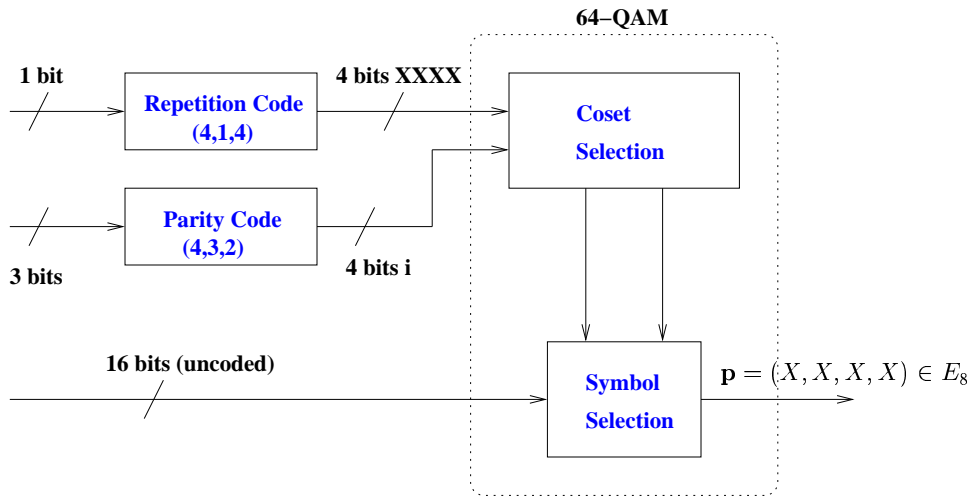


FIG. 5 – Encoder for an  $E_8$  constellation. Information rate is 5 bits per complex dimension.